

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
18 October 2001 (18.10.2001)

PCT

(10) International Publication Number  
**WO 01/78278 A1**

(51) International Patent Classification<sup>7</sup>: **H04J 3/16**,  
H04Q 7/22

02476 (US). REHN, Norman; 1 Anchor Way, Newbury,  
MA 01957 (US). PASSMAN, William, S.; 198 East Street,  
Lexington, MA 02420 (US).

(21) International Application Number: PCT/US01/11548

(22) International Filing Date: 10 April 2001 (10.04.2001)

(74) Agent: SUCHYTA, Leonard, C.; c/o Christian R. Ander-  
sen, 600 Hidden Ridge Drive, Mailcode HQE03H01, Ir-  
ving, TX 75038 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/546,052 10 April 2000 (10.04.2000) US

(81) Designated States (*national*): AE, AG, AL, AM, AT, AT  
(utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA,  
CH, CN, CR, CU, CZ, CZ (utility model), DE, DE (utility  
model), DK, DK (utility model), DM, DZ, EE, EE (utility  
model), ES, FI, FI (utility model), GB, GD, GE, GH, GM,  
HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK,  
LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX,  
MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK  
(utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN,  
YU, ZA, ZW.


(71) Applicants: GTE SERVICE CORPORATION  
[US/US]; 600 Hidden Ridge Drive, Irving, TX 75038  
(US). GENUITY INC. [US/US]; 600 Hidden Ridge  
Drive, Irving, TX 75038 (US).

(72) Inventors: WEINSTEIN, Joseph, J.; 94 Beacon Street,  
Apartment 31, Somerville, MA 02143 (US). ZAVGREN,  
John, R.; 15 Deacon Hunt Road, Acton, MA 01720 (US).  
ELLIOTT, Brig, B.; 25 Wollaston Avenue, Arlington, MA

(84) Designated States (*regional*): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,

[Continued on next page]

(54) Title: RADIO NETWORK ROUTING APPARATUS

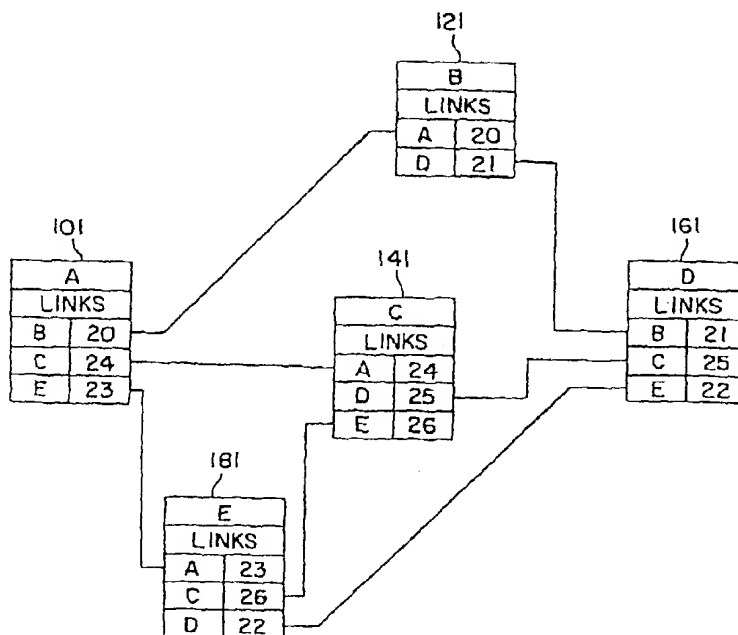

(57) Abstract: In a radio network having plural routers (10, 12, 14, 16, 18), each router includes a routing table (101, 121, 141, 161, 181). Link state information of the network that has been forwarded to the router is received and used to determine the connections in the network. The determined network connections are collected to generate network topology information which is placed in the routing table (101, 121, 141, 161, 181). The network topology information is retrievable for inclusion in messages forwarded by the receiving router.

WO 01/78278 A1

WO 01/78278 A1



IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**Published:**

— with international search report

## RADIO NETWORK ROUTING APPARATUS

### BACKGROUND

5    1.        Technical Field

The present invention relates to a radio network routing apparatus, and more particularly, to a protocol which reduces the amount of protocol traffic in mobile network routing.

2.        Description of Related Art

10   Mobile networks typically use radios to communicate, but such radios are relatively slow data paths, as compared to wired networks or networks connected with fiber-optics.

In computer networks, the Open Shortest Path First (OSPF) routing algorithm is used for synchronizing the communication information in a  
15   computer network. The OSPF routing protocol, is a type of link-state protocol. A detailed discussion of link-state routing, including the OSPF protocol is included in Chapter 5 of Routing in Communications Networks by Martha Steenstrup and Chapter 5.2.2 of Computer Networks by Andrew S. Tanenbaum. OSPF provides a method of synchronizing  
20   databases in computer network "routers." In OSPF, the router periodically advertises information describing its own database data (also referred to, herein, as link state data) to a neighboring router and includes a sequence number that the neighboring router can use to detect old or duplicate advertisements. The router increases the sequence number when it  
25   originates a new version of the advertisement. Thus, a larger sequence number signifies a more recent advertisement. The OSPF routing algorithm is also described in U.S. Patent No. 5,913,921 (Tosey et al.) and U.S. Patent No. 5,881,246 (Crawley et al.).

Mobile networks have been unable to use standard OSPF protocols to

- 2 -

exchange internet routes and addresses. This is primarily due to the fact that OSPF protocols require constant route discovery through the use of HELLO messages. HELLO messages are packets of information dispersed by each node throughout the network to determine network topology. This HELLO traffic, alone, can potentially utilize all of the message capability (also referred to, herein, as "bandwidth") of a mobile network having numerous nodes.

For example, a network consisting of four radio nodes (i.e., NODE A, NODE B, NODE C, AND NODE D) would generate several HELLO messages.

10 NODE A would send a HELLO message to each of NODES B, C, and D;  
NODE B would send a HELLO message to each of NODES A, C, and D;  
NODE C would send a HELLO message to each of NODES A, B, and D; and  
NODE D would send a HELLO message to each of NODES A, B, and C. Each such HELLO message sent by a radio node must be answered with a reply

15 HELLO message. Thus, the resulting number of HELLO messages (HM) for a network with N nodes can be determined by the following formula:

$$HM = N \times (N - 1) \times 2$$

Accordingly, a network with four nodes would generate 24 HELLO messages. A network of 100 nodes would produce 19,800 HELLO

20 messages. Clearly, the generation of so many HELLO messages in OSPF protocols has made the use of such protocols in mobile networks unfeasible.

### SUMMARY

Among the several objects of the present invention, is to reduce the amount of protocol traffic and, thereby, reduce bandwidth usage. Another objective of the present invention is to keep protocol messages as short as possible.

According to a first aspect of the present invention, each router in a radio network having a plurality of routers comprises a memory storing a

30 routing table, and a receiver for receiving link state information from the

- 3 -

network. A processor is provided for (i) determining, responsive to the received link state information forwarded to the router, a status of connections in the network, (ii) generating network topology information based on the determined connection status information, (ii) placing the  
5 generated network topology information in said routing table, and (iv) transmitting the network topology information in the routing table to at least one other router in the network.

According to a second aspect of the present invention, a method of distributing network topology information in a radio network that  
10 includes a plurality of routers comprises the steps of receiving link state information of the network that is forwarded to each router; determining connections of devices in the network in the receiving router responsive to the received link state information forwarded to the router; and collecting the determined device connection information to generate network  
15 topology information in the receiving router. The generated network topology information is placed in a routing table of the receiving router, and the network topology information is retrieved from the routing table.

According to a third aspect of the present invention, a routing system in a radio network having plural routers comprises a plurality of routers each  
20 including a receiver for receiving link state information from the network in a message issued to the plurality of routers. Each router also includes a processor, responsive to the received link state information, for (i) determining router connection information in the network, (ii) collecting the determined router connection information (iii) generating network  
25 topology information from the collected router connection information, (iv) storing the generated network topology information in a routing table, and (v) retrieving the network topology information in the routing table and forming it into a link state message to be broadcast to at least one other router in the network.

30 According to a fourth aspect of the present invention, a computer executable software code stored on a computer readable medium is used for

- 4 -

distributing network topology information in a radio network that includes a plurality of routers. The code comprises code for receiving link state information of the network that is forwarded to each router; code for determining connections of devices in the network in the receiving router  
5 responsive to the received link state information forwarded to the router; and code for collecting the determined device connection information to generate network topology information in the receiving router. Code is included for placing the generated network topology information in a routing table of the receiving router, and code is provided for retrieving  
10 the network topology information from the routing table.

The foregoing and other objects, advantages, and features of the present invention will become more apparent from the following detailed description of the preferred embodiments taken in conjunction with the accompanying drawings.

15

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram of a mobile communications station.

Fig. 2 is a diagram illustrating a radio network configuration in accordance with the present invention.

20 Fig. 3 is a diagram illustrating routing tables for each router in the radio network of Fig. 2.

Fig. 4 is a flow chart illustrating the routing method of the present invention.

25 Fig. 5 is a diagram illustrating a "backbone" network of the present invention.

Figs. 6A and 6B are diagrams of a packet radio network with and without a designated router.

Fig. 7 is a flow chart of the ROSPF processing method.

## DETAILED DESCRIPTION

The present invention relates in substantial part to a radio open shortest path first (ROSPF) protocol in mobile networking routing. In particular, this protocol (which can be used in Intranet routing) involves

5 dramatically reducing the amount of protocol traffic and shortening the length of each protocol message. The reduction in protocol traffic facilitates the use of ROSPF protocols in mobile networks.

Typically, HELLO messaging is the only way that the radio learns about other nodes in the system. However, the current invention does not  
10 require such extensive messaging. Rather, the ROSPF protocol utilizes the current forwarding table of a radio node to learn about the other nodes in the system. The mobile routing protocol initiates link state flooding every second or so in a controlled manner to determine the connectivity topology of the network. Flooding is known to those of ordinary skill in the art, for  
15 example, as described in Steenstrup's Routing in Communications Networks. The flooding procedure is used for distributing link-state advertisements (LSA) (also referred to, herein, as link-state packets, LSP) throughout the routing domain. When the connectivity of the network changes, a new LSA describing the change must be created and flooded to  
20 all of the other nodes. There is no need for reply messaging.

The preferred embodiments will be described with respect to a wireless mobile communications station and to a network formed by a plurality of similar mobile stations. However, the present invention is not limited to  
25 the wireless mobile communications field. Instead, the invention is applicable to many other types of networks, including cellular telephone systems, wireless metropolitan area networks, and so forth.

Figure 1 depicts a wireless communications station 2. The mobile station 2 includes a central processing unit (CPU) 3, a memory 4 (suitable for storing computer executable software therein), a power supply 5, a  
30 transceiver 6 (e.g., a transmitter and a receiver), RAM 7, and ROM 8. Alternatively, the mobile station 2 may include more than one



- 6 -

transmitter and/or more than one receiver. The mobile station 2 can also include an Ethernet interface, as well as other interfacing ports. With these arrangements, the mobile station 2 is able to simultaneously communicate with more than one station. Communication with multiple  
5 stations can occur, for example, through different channels (or "communication links"), and/or by transmitting specific identifying information (or "coded information") for each intended source or target.

Figure 2 is a schematic diagram of radio nodes in a wireless network according to the present invention. Five routers 10, 12, 14, 16, and 18  
10 comprise the wireless network. Established channels or data communication links connecting the various routers are designated by reference characters 20-26. The reference characters 20-26 also represent the cost of communicating along each respective channel (i.e., the cost of sending data traffic over each link). For example, the cost of  
15 sending data traffic from node A to node B is 20.

While Figure 2 illustrates a particular interconnection of the various stations shown, it should be understood that this configuration of connections is not pre-determined and that other patterns of connections might easily arise in accordance with the present invention. Moreover,  
20 the pattern of connections can change during operation, both to accommodate the introduction of new stations and to allow for the withdrawal or movement of one of the nodes. The mode of operation of each router is controlled by an embedded microprocessor (e.g. the CPU) and the method of operation described herein is intended to be  
25 implemented automatically by the programming of the microprocessors.

Figure 3 is illustrative of the routing tables for each node in the network. Upon collecting the network topology information, each router builds a routing table (stored in memory) containing the acquired data. The routing table includes information such as the identity of the relevant  
30 router, a list of the router's operational links, the cost of each operational link, the identity of the node to which the router connects, and other such

- 7 -

information.

The routing domain for the network in Figure 2 is displayed in Figure 3.

The routing tables 101, 121, 141, 161, and 181 correspond to routers 10, 12, 14, 16, and 18, respectively. The routing table 101 for router 10

5 (radio node A) advertises three active interfaces: one connecting to router 12 (node B) with a cost of 20, one connecting to router 14 (node C) with a cost of 24, and one connecting to router 18 (node E) with a cost of 23.

Numerous other categories of information may be stored in these routing tables. For example, the sequence number, which is used to determine the  
10 most up-to-date instance of data in the routing table, can be stored.

Additionally, the age of a routing table can be stored so as to indicate when defunct data should be discarded and when the radio node should refresh its router. Another helpful type of data to be stored is the checksum of an advertisement's contents which assists in guarding against data

15 corruption.

Adding more detailed and voluminous data in the routing table can facilitate more sophisticated routing-table calculations which are used for efficient message forwarding in a mobile network.

The topology information is collected by the routing protocols using  
20 minimum bandwidth, so that it does not need to be collected again by ROSPF or any type of HELLO messaging.

In the overall method, shown in Figure 4, each radio node is activated initially by the POWER ON step S1. A delay of random duration, e.g. from 1 to 60 seconds, is provided as indicated in step S2. After the delay, the  
25 router executes the receiving step S3 for receiving link state information of the network that has been forwarded to the router.

Subsequently, the determining step S4 is activated and is responsive to the received link state information forwarded to the router for determining connections in the network. If there are other accessible nodes in the  
30 network (step S5), then the network connection information is collected by

- 8 -

the collecting step S7 and placed in the routing table in the placing step S8.

However, if there are no accessible nodes in the network, then the controlling step S6 is executed. The controlling step S6 determines how often the router will attempt to gather and distribute network topology information. The controller can be programmed so that it controls the frequency of this procedure based on a myriad of factors. For example, the flooding can occur periodically at regular intervals, e.g. every minute, every 10 minutes, every hour, etc. The controller can also activate this procedure in response to a significant event, such as when a neighboring node leaves or joins a network.

In the case wherein there are other accessible nodes in the network and the data regarding these other nodes has been stored in the routing table, a determination is made in step S9 regarding whether there are messages that need to be forwarded to other nodes in the network. If the response to the inquiry in step S9 is affirmative, then the retrieving step is executed in step S10. Once that is complete, the controlling step is executed in step S6. Based on the frequency with which the controlling step is activating the overall procedure, the process will begin again at the appropriate time. However, if the response to the inquiry in step S9 is negative, then resignation from the network occurs in step S11.

The ROSPF protocol has a functionality like the OSPF protocol. However, in the ROSPF protocol, the "behavior" of the router has been modified to eliminate enormous quantities of traffic that would otherwise "clog" a large, multi-hop, low bandwidth network, such as a packet radio network. ROSPF allows a large packet radio network to become an internet protocol (IP) backbone. As explained in further detail below, the ROSPF protocol defines a parasitic relationship between two routing protocols.

Figure 5 illustrates a backbone network that is arranged using OSPF. The purpose of OSPF is to compute routes to IP networks. In an initial step of OSPF, each router discovers its neighbors. This is accomplished using the

- 9 -

Hello protocol. It not only discovers neighbors but it also elects a "spokesperson" for the network called the designated router.

Secondly, each router constructs Link State Packets (LSPs) that contain the IDs and costs of the links to its neighbors.

- 5 Next step, the LSPs are transmitted to all the other neighbors, via the designated router using the link state flooding process. Each router stores the most recently generated LSP from each of the other routers, and creates a link state database. The link state database defines the topology (i.e., the configuration of the nodes and links) of the network and the cost  
10 of each link.

Finally, each router uses the link state database to compute routes to each destination.

- The network illustrated in Figure 5 depicts a backbone network created by OSPF. The backbone network provides the means for connecting IP  
15 networks X, Y, and Z. Router 193, which is depicted as the designated router, exchanges LSPs with the other two routers. Router 191 and router 192 do not have the capability to exchange LSPs with each other directly.

- However it is feasible to use OSPF to create an IP backbone only when the number of OSPF routers that are attached to the backbone network is  
20 small in comparison to the bandwidth of the backbone network.

Otherwise, in a case when the backbone network is a large-scale packet radio network with limited link bandwidth and a large number of nodes, then the OSPF protocol and LSP traffic will exceed the capacity of the backbone network.

- 25 ROSPF uses two primary mechanisms to either reduce or eliminate these traffic loads.

- The first mechanism is the elimination of the hello protocol that is an aspect of OSPF. When the backbone network is a packet radio network with an Intranet routing algorithm, and every router in this network is  
30 running OSPF, then the Intranet routing algorithm already has

- 10 -

- information that is equivalent to the information that would be obtained by the OSPF hello protocol. In this particular case, the hello protocol is redundant and can be eliminated. However, this redundancy would not exist if the backbone network consists of, for example, an Ethernet LAN or an X.25 network. Accordingly, ROSPF can primarily be used in conjunction with a network that has an Intranet routing algorithm. The Intranet is an independent entity that provides information to the OSPF protocol, while ROSPF defines the parasitic relationship between the Intranet and the OSPF protocols.
- 10 The second mechanism employed by ROSPF is the elimination of designated routers. Designated routers define the way that link state packets are flooded. They flow from a given router to the designated router and then fan out to reach all the other routers. In a large scale network, the flow of link state packets through the designated router can make it a "hot spot" as illustrated in Figure 6A, wherein designated router 15 202 denotes the hot spot of the network. In a packet radio network with an Intranet routing algorithm, the backbone network topology includes a connected graph, as shown in Figure 6A. The Intranet forwarding tables define the routes that packets take through the network.
- 20 However, in ROSPF there is no designated router and IP LSPs are exchanged by each node with its Intranet neighbors. In essence, IP link state packets flow through the network like a rumor in a community, or a ripple in a pond. As such, ROSPF eliminates the designated router hot spot. The ROSPF/Intranet interface enables the Intranet to provide ROSPF with two lists: the next-hop list and the census list. The next-hop list is used to 25 define OSPF adjacencies (i.e., one-hop radio neighbors). The census list is used identify all radio routers on the network. Deltas (differences in these lists) are used to quickly detect deceased routers.
- 30 The ROSPF processing method is illustrated in Figure 7. In step S20, ROSPF queries the Intranet. The next-hop list is processed in step S21. In this step the network is examined for deltas to build OSPF adjacencies with

new neighbors and terminate OSPF adjacencies with missing neighbors.

The census list is processed in step S22. The census list defines all of the nodes that are currently in the network. The deltas are computed by comparing the new list with the old list. ROSPF ignores the new nodes, but  
5 identifies the nodes that have "dropped off" the list. For each node that is no longer on the list, ROSPF marks the IP link-state that the node advertised as irrelevant and computes an updated IP forwarding table. Census list processing allows ROSPF to quickly detect "dead" routers.

The ROSPF process is cyclical and begins again at step S20. The frequency  
10 of the Intranet queries can be periodic, predetermined, or set by any number of variables.

While the present invention has been described with respect to what are presently considered to be the preferred embodiments, it is to be understood that the invention is not limited to the disclosed embodiments.  
15 The present invention is intended to cover various modifications and equivalent arrangements included within the spirit and scope of the appended claims.

For example, the radio network has been described as having five radio communication nodes (Figures 2 and 3). However, the network can  
20 include any number of radio and wired links. Also, as will be appreciated by those skilled in the art, the methods and control logic, as described herein, can be embodied in a programmable computer or computer executable software that is stored on computer readable media, for example, on a floppy disk, RAM, ROM, a hard disk, removable medium,  
25 flash memory, memory sticks, optical medium, magneto-optical mediums, etc.

Additionally, the described methods, structure, and functions are directed to wireless mobile communications stations that automatically configure themselves in a mobile communications network, with each mobile station  
30 directing its respective affiliation. However, control of such configurations could be centralized to cluster heads, for example, which would then direct

affiliation on a network level to optimize the network. Furthermore, the above methods and structure are not limited to wireless communications networks, but may be employed by any system wherein there is an Intranet protocol to interface with the ROSPF protocol.

**WHAT IS CLAIMED IS:**

1. A router for a radio network that includes a plurality of  
5 other routers, said router comprising:

a memory storing a routing table;

a receiver for receiving link state information from the  
network; and

a processor for (i) determining, responsive to the received link  
10 state information forwarded to the router, a status of connections in the  
network, (ii) generating network topology information based on the  
determined connection status information, (ii) placing the generated  
network topology information in said routing table, and (iv) transmitting  
the network topology information in the routing table to at least one other  
15 router in the network.

2. A router according to Claim 1, wherein the processor  
transmits the network topology information to the at least one other  
router in the network at a predetermined cycle.

20

3. A router according to Claim 1, further comprising a  
transmitter for transmitting a message including the network topology  
information retrieved from said routing table.

25 4. A method of distributing network topology information  
in a radio network that includes a plurality of other routers comprising  
the steps of:

receiving link state information of the network that is



- 14 -

forwarded to each router;

determining connections of devices in the network in the receiving router responsive to the received link state information forwarded to the router;

5               collecting the determined device connection information to generate network topology information in the receiving router;

              placing the generated network topology information in a routing table of the receiving router; and

              retrieving the network topology information from the routing  
10   table.

5.    A method according to Claim 4, wherein the network topology information is generated periodically.

15           6.    A method according to Claim 4, further comprising the step of transmitting a message by the receiving router including the network topology information retrieved from the routing table.

              7.    A method according to Claim 4, wherein the link state  
20   information is transmitted to the plurality of routers at predetermined times.

              8.    A method according to Claim 4, wherein the link state information is forwarded to the plurality of routers periodically.

25

              9.    A routing system in a radio network having plural routers, comprising:

              a plurality of routers each including:

-15 -

a receiver for receiving link state information from the network in a message issued to the plurality of routers;

a processor in each router, responsive to the received link state information, for (i) determining router connection information in the network, (ii) collecting the determined router connection information (iii) generating network topology information from the collected router connection information, (iv) storing the generated network topology information in a routing table, and (v) retrieving the network topology information in the routing table and forming it into a link state message to be broadcast to at least one other router in the network.

10. A routing system according to Claim 9, wherein each processor periodically generates the network topology information.

11. A routing system according to Claim 9, further comprising a transmitter in each router for transmitting the link state message including the network topology information retrieved from the routing table.

12. A routing system according to Claim 11, wherein the transmitter transmits the link state information message to a plurality of routers at predetermined times.

13. A routing system according to Claim 11, wherein the transmitter periodically broadcasts the link state information message to the plurality of routers.

14. A routing system according to Claim 9, wherein the transmitter transmits the link state information message to the plurality

- 16 -

of routers after its corresponding receiver receives the link state information from the network.

15. Computer executable software code stored on a  
5 computer readable medium, the code for distributing network topology information in a radio network that includes a plurality of routers, the code comprising:

code for receiving link state information of the network that is forwarded to each router;

10 code for determining connections of devices in the network in the receiving router responsive to the received link state information forwarded to the router;

code for collecting the determined device connection information to generate network topology information in the receiving  
15 router;

code for placing the generated network topology information in a routing table of the receiving router; and

code for retrieving the network topology information from the routing table.

20

16. A router for a radio network that includes a plurality of other routers, said router comprising:

means for storing a routing table;

means for receiving link state information from the network;

25 means, responsive to the received link state information forwarded to the router, for determining a status of connections in the network;

means for generating network topology information based on

- 17 -

the determined connection status information;

means for placing the generated network topology  
information in said routing table; and

means for transmitting the network topology information in  
5 the routing table to at least one other router in the network.

17. A routing system in a radio network having plural  
router, comprising a plurality of routers, comprising a plurality of router,  
each router including:

10 means for receiving link state information from the network  
in a message issued to the plurality of routers;

means for determining router connection information in the  
network;

means for collecting the determined router connection  
15 information;

means for generating network topology information from the  
collected router connection information;

means for storing the generated network topology information  
in a routing table; and

20 means for retrieving the network topology information in the  
rating table and forming it into a link state message to be broadcast to at  
least one other router in the network.

1/7

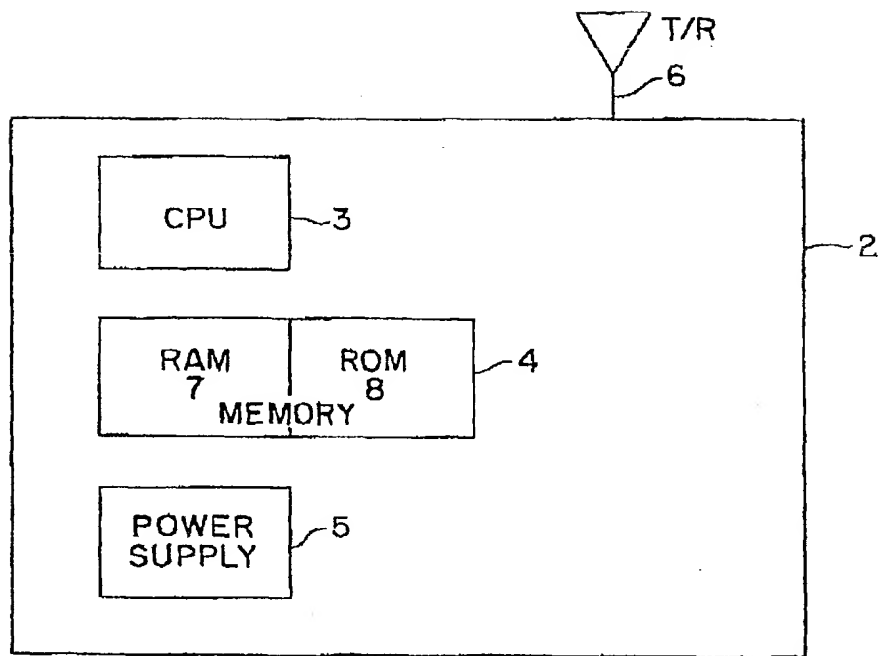


FIG. 1

2/7

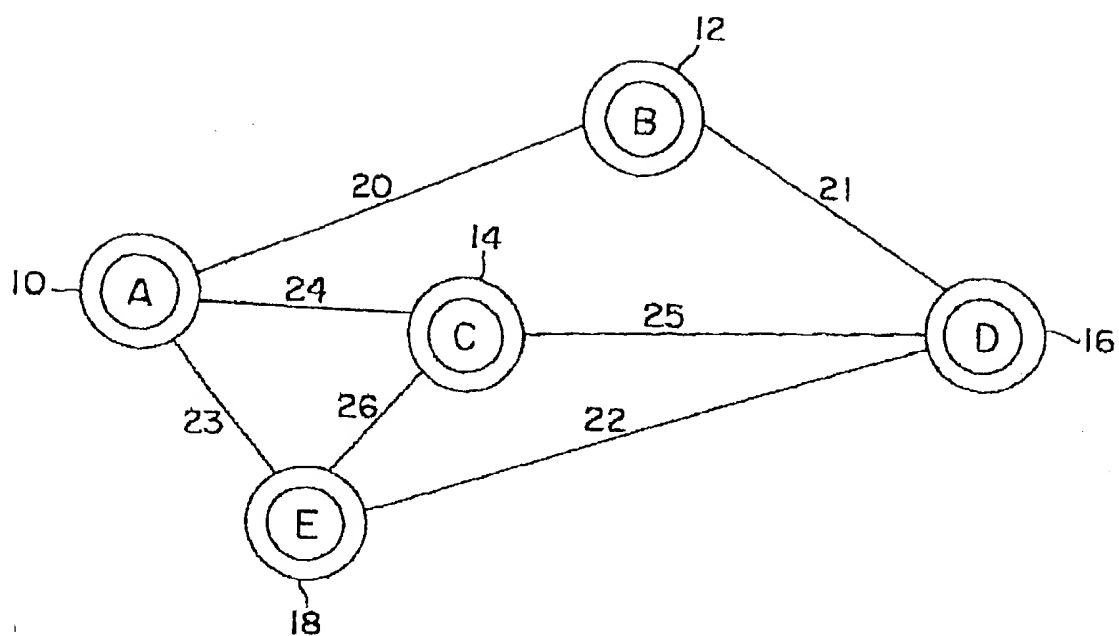


FIG. 2

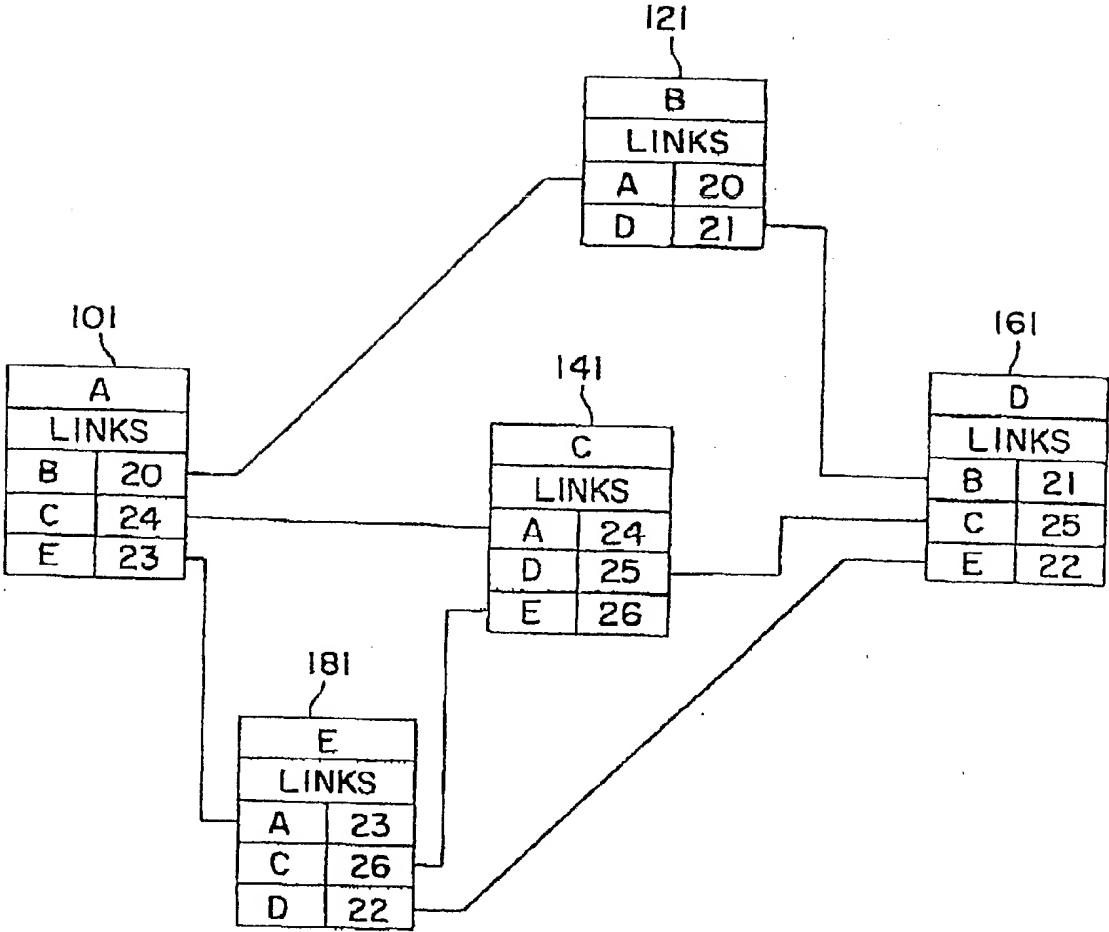


FIG. 3

4/7

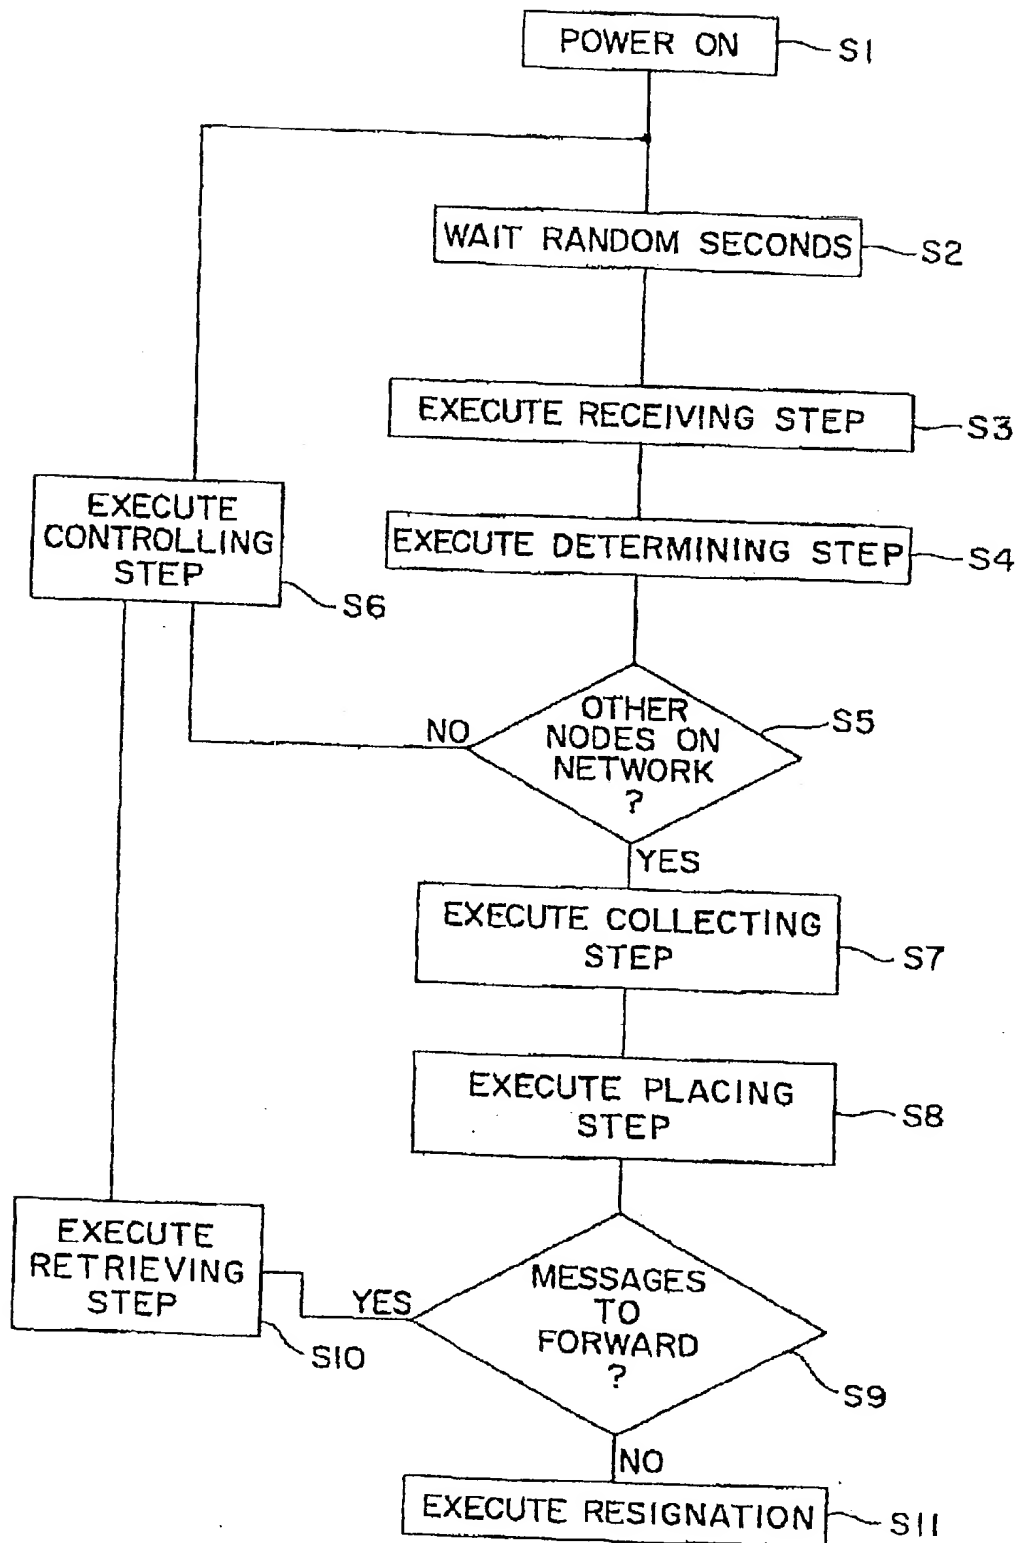


FIG. 4



5/7

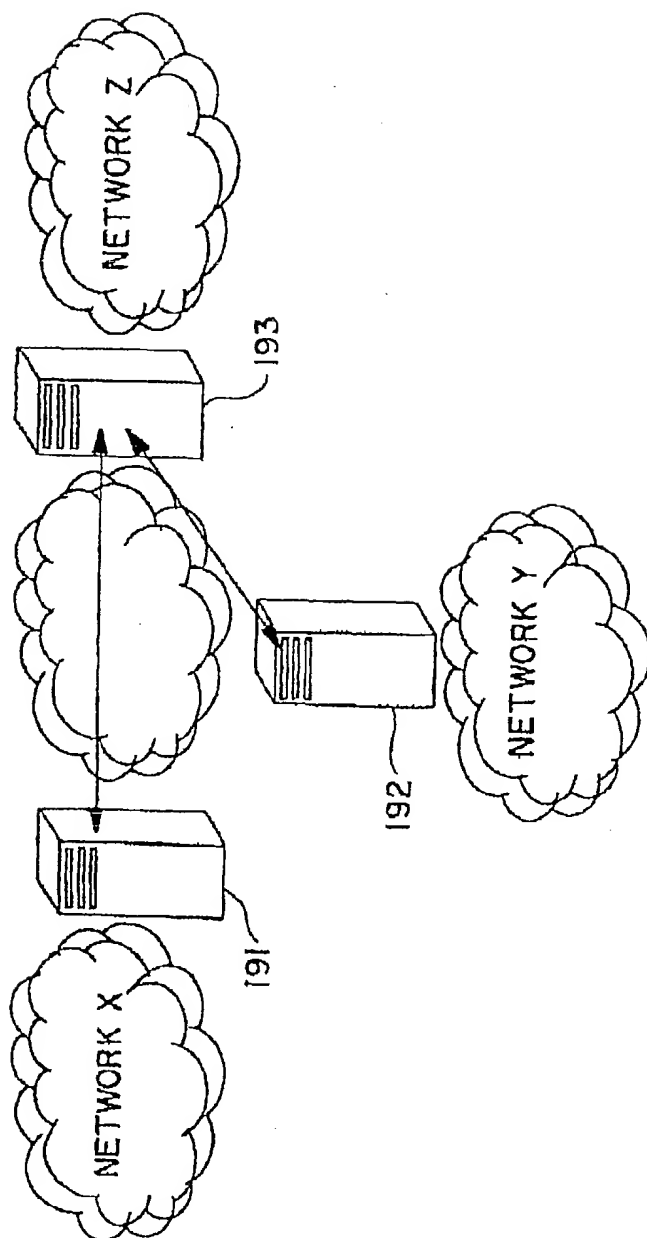


FIG. 5

6/7

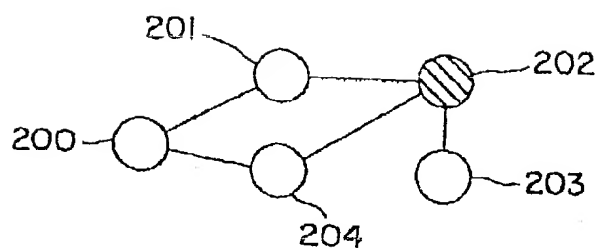


FIG. 6A

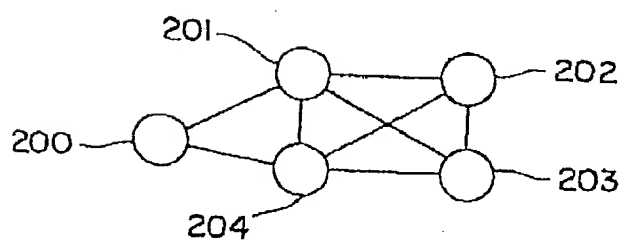


FIG. 6B

7/7

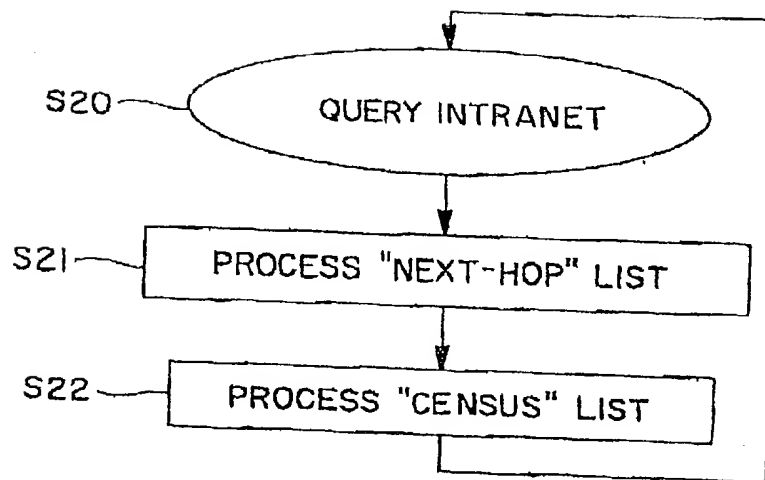


FIG. 7

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US01/11548

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : H04J 3/16; H04Q 7/22

US CL : 370/238, 252, 254, 255, 310, 312, 400

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 370/238, 252, 254, 255, 310, 312, 400

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,412,654 A (PERKINS) 02 May 1995 (02.05.1995), See Abstract	1-17
X	US 5,117,422 A (HAUPTSCHNEIN et al) 26 May 1992 (26.05.1995), See Fig 13 and col. 3, lines 10 to col. 4, lines 64.	1-17



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

29 June 2001 (29.06.2001)

Date of mailing of the international search report

02 AUG 2001

Name and mailing address of the ISA/US

Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231

Facsimile No. (703)305-3230

Authorized officer

Chun Wellington

Telephone No. (703) 308-4366